

SHAFT SEALS WITH A TYPE 5 STOP SC5

DESCRIPTION

The SC5 profile is a shaft seal composed of a staggered metal cage with a rubber coating, an external stop and a primary sealing lip with an integrated spring.

ADVANTAGES

- Very good static sealing
- Very good thermal expansion compensation
- Precise positioning when stopped
- Greater roughness is allowed in the housing
- Reduced risk of corrosion
- Sealing for low and high viscosity fluids
- Modern primary sealing lip with low radial forces

APPLICATIONS

- All types of rotative applications
- Machine tools Gear boxes
- Agriculture Motors
- Construction Pumps
- Transmissions

MATERIALS

Rubber

- ACM 70 - 75 Shore A
- EPDM 70 - 75 Shore A
- FKM 70 - 75 Shore A
- HNBR 70 - 75 Shore A
- NBR 70 - 75 Shore A

Metal cage

Steel - AISI 1010

Spring

- Steel - AISI 1070 - 1090
- Stainless steel - AISI 316

SEAL DESIGN

Tolerance for the outside diameter of the seal (ØD)

| Bore diameter ØD1 (mm) | Apparent metal cage | Rubber coating | Coating with grooves |
|------------------------|---------------------|----------------|----------------------|
| ØD1 ≤ 50.0 | +0.10 / +0.20 | +0.15 / +0.30 | +0.20 / +0.40 |
| 50.0 < ØD1 ≤ 80.0 | +0.13 / +0.23 | +0.20 / +0.35 | +0.25 / +0.45 |
| 80.0 < ØD1 ≤ 120.0 | +0.15 / +0.25 | +0.20 / +0.35 | +0.25 / +0.45 |
| 120.0 < ØD1 ≤ 180.0 | +0.18 / +0.28 | +0.25 / +0.45 | +0.30 / +0.55 |
| 180.0 < ØD1 ≤ 300.0 | +0.20 / +0.30 | +0.25 / +0.45 | +0.30 / +0.55 |
| 300.0 < ØD1 ≤ 500.0 | +0.23 / +0.35 | +0.30 / +0.55 | +0.35 / +0.65 |
| 500.0 < ØD1 ≤ 630.0 | +0.23 / +0.35 | +0.35 / +0.65 | +0.40 / +0.75 |




Roundness tolerance

| Bore diameter ØD1 (mm) | Apparent metal cage | Rubber coating |
|------------------------|-------------------------------|----------------|
| ØD1 ≤ 50.0 | 0.18 | 0.25 |
| 50.0 < ØD1 ≤ 80.0 | 0.25 | 0.35 |
| 80.0 < ØD1 ≤ 120.0 | 0.30 | 0.50 |
| 120.0 < ØD1 ≤ 180.0 | 0.40 | 0.65 |
| 180.0 < ØD1 ≤ 300.0 | 0.25% of the outside diameter | 0.80 |
| 300.0 < ØD1 ≤ 500.0 | 0.25% of the outside diameter | 1.00 |
| 500.0 < ØD1 ≤ 630.0 | - | - |

Tolerance for the inside diameter of the seal (Ød)

Free and without constraint, the inside diameter of the sealing lip is always smaller than the diameter of the shaft. The pre-tightening or interference denotes the difference between these two values. Depending on the shaft diameter, the diameter of the sealing lip is generally considered to be less, between 0.8 and 3.5 mm.


Pumping leads

| Clockwise | Anti-clockwise | Bi-directional |
|---|--|---|
|  |  |  |
| R | L | H0 |

Other types of pumping leads can be created according to your specifications. Please contact our experts.

TECHNICAL DATA

Speed

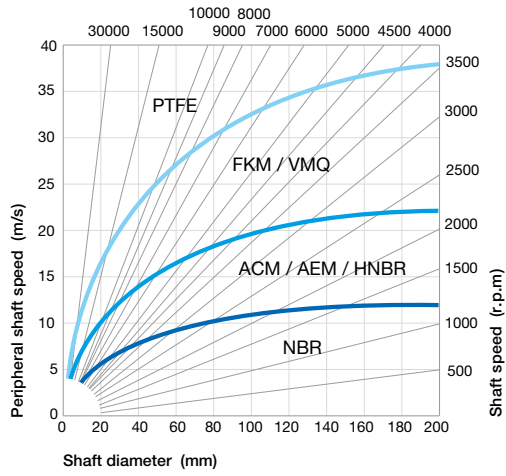

The shaft seals with an additional protective lip are limited to a speed of 8 m/sec.


Linear speed calculation:

$$s \text{ (m/s)} = \frac{[\text{shaft } \varnothing \text{ (mm)} \times \text{speed (rpm)} \times \pi]}{60,000}$$

Pressure


The standard shaft seals are generally used in unpressurised environments, or for pressures between 0.02 and 0.05 MPa maximum.

Higher pressures are acceptable, following testing, for standard NBR or FKM shaft seals used on a shaft diameter less than 30 mm.

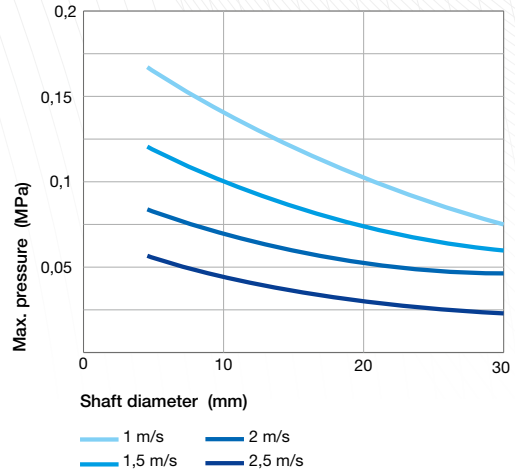

Temperature / Media

| Media | | Maximum temperature depending on the materials | | | | | | |
|-----------------------|---|--|--------|--------|--------|--------|--------|--------|
| | | ACM | AEM | EPDM | FKM | HNBR | NBR | VMQ |
| Mineral oils | Oils for motors | +130°C | +130°C | - | +170°C | +130°C | +100°C | +150°C |
| | Oils for gearboxes | +120°C | +130°C | - | +150°C | +110°C | +80°C | +130°C |
| | Oils for hypoid gears | +120°C | +130°C | - | +150°C | +110°C | +80°C | - |
| | ATF oils | +120°C | +130°C | - | +170°C | +130°C | +100°C | - |
| | Hydraulic oils | +120°C | +130°C | - | +150°C | +130°C | +90°C | - |
| | Greases | - | +130°C | - | - | +100°C | +90°C | - |
| Fire-resistant fluids | HFA group - Emulsion with more than 80% water | - | - | - | - | +70°C | +70°C | +60°C |
| | HFB group - Opposite solution (water in oil) | - | - | - | - | +70°C | +70°C | +60°C |
| | HFC group - Polymer aqueous solution | - | - | +60°C | - | +70°C | +70°C | - |
| | HFD group - Water-free synthetic fluids | - | - | - | +150°C | - | - | - |
| Other fluids | EL + L heating oil | - | - | - | - | +100°C | +90°C | - |
| | Air | +150°C | +150°C | +150°C | +200°C | +130°C | +100°C | +200°C |
| | Water | - | - | +150°C | +100°C | +100°C | +90°C | - |
| | Water for washing | - | - | +130°C | +100°C | +100°C | +90°C | - |
| Temperature range | Min. | -25°C | -40°C | -45°C | -20°C | -30°C | -30°C | -60°C |
| | Max. | +150°C | +150°C | +150°C | +200°C | +150°C | +100°C | +200°C |

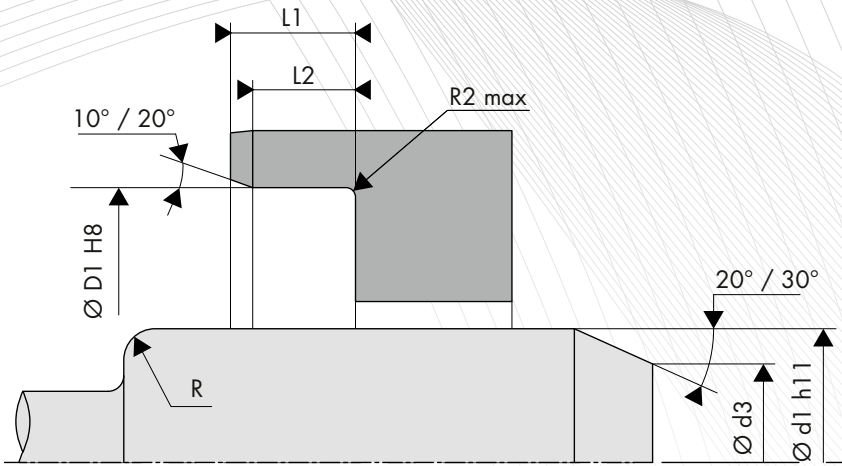

SHAFT DESIGN

Shaft hardness

| Rotation speed | Hardness in HRC |
|-------------------------|-----------------|
| $s \leq 4.0$ m/sec | 45 HRC |
| $4.0 < s \leq 10.0$ m/s | 55 HRC |
| $s > 10.0$ m/sec | 60 HRC |

Surface roughness

| | |
|------|--------------------------|
| Ra * | 0.2 to 0.8 μm |
| Rz | 1.0 to 4.0 μm |
| Rmax | ≤ 6.3 μm |

*Ra = 0.1 μm for demanding applications


Shaft tolerance

| Shaft diameter $\varnothing d1$ (mm) | Tolerance h11 (mm) |
|--------------------------------------|--------------------|
| $\varnothing d1 \leq 3.0$ | -0.060 / 0 |
| $3.0 < \varnothing d1 \leq 6.0$ | -0.075 / 0 |
| $6.0 < \varnothing d1 \leq 10.0$ | -0.090 / 0 |
| $10.0 < \varnothing d1 \leq 18.0$ | -0.110 / 0 |
| $18.0 < \varnothing d1 \leq 30.0$ | -0.130 / 0 |
| $30.0 < \varnothing d1 \leq 50.0$ | -0.160 / 0 |
| $50.0 < \varnothing d1 \leq 80.0$ | -0.190 / 0 |
| $80.0 < \varnothing d1 \leq 120.0$ | -0.220 / 0 |
| $120.0 < \varnothing d1 \leq 180.0$ | -0.250 / 0 |
| $180.0 < \varnothing d1 \leq 250.0$ | -0.290 / 0 |
| $250.0 < \varnothing d1 \leq 315.0$ | -0.320 / 0 |
| $315.0 < \varnothing d1 \leq 400.0$ | -0.360 / 0 |
| $400.0 < \varnothing d1 \leq 500.0$ | -0.400 / 0 |


Chamfer and radius


| Shaft diameter $\varnothing d1$ (mm) | Chamfer diameter $\varnothing d3$ (mm) | Radius R (mm) |
|--------------------------------------|--|---------------|
| $\varnothing d1 \leq 10.0$ | $\varnothing d1 - 1.50$ | 2.00 |
| $10.0 < \varnothing d1 \leq 20.0$ | $\varnothing d1 - 2.00$ | 2.00 |
| $20.0 < \varnothing d1 \leq 30.0$ | $\varnothing d1 - 2.50$ | 3.00 |
| $30.0 < \varnothing d1 \leq 40.0$ | $\varnothing d1 - 3.00$ | 3.00 |
| $40.0 < \varnothing d1 \leq 50.0$ | $\varnothing d1 - 3.50$ | 4.00 |
| $50.0 < \varnothing d1 \leq 70.0$ | $\varnothing d1 - 4.00$ | 4.00 |
| $70.0 < \varnothing d1 \leq 95.0$ | $\varnothing d1 - 4.50$ | 5.00 |
| $95.0 < \varnothing d1 \leq 130.0$ | $\varnothing d1 - 5.50$ | 6.00 |
| $130.0 < \varnothing d1 \leq 240.0$ | $\varnothing d1 - 7.00$ | 8.00 |
| $240.0 < \varnothing d1 \leq 500.0$ | $\varnothing d1 - 11.00$ | 12.00 |

Shaft run out

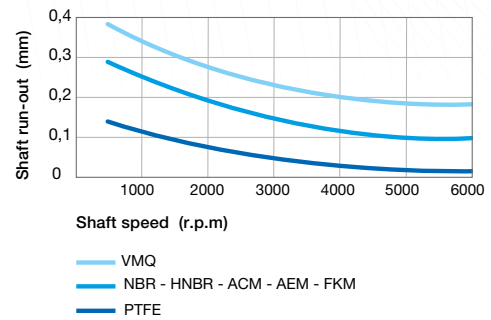

Eccentricity

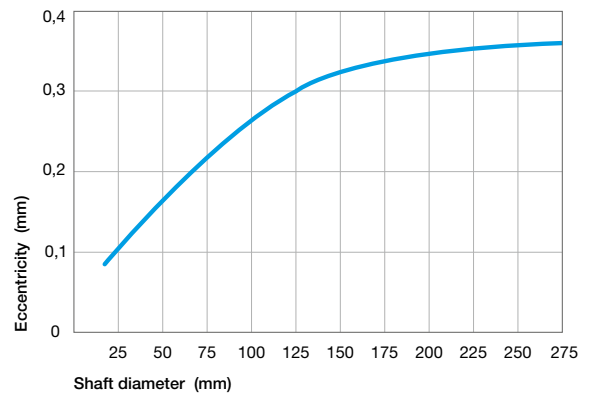

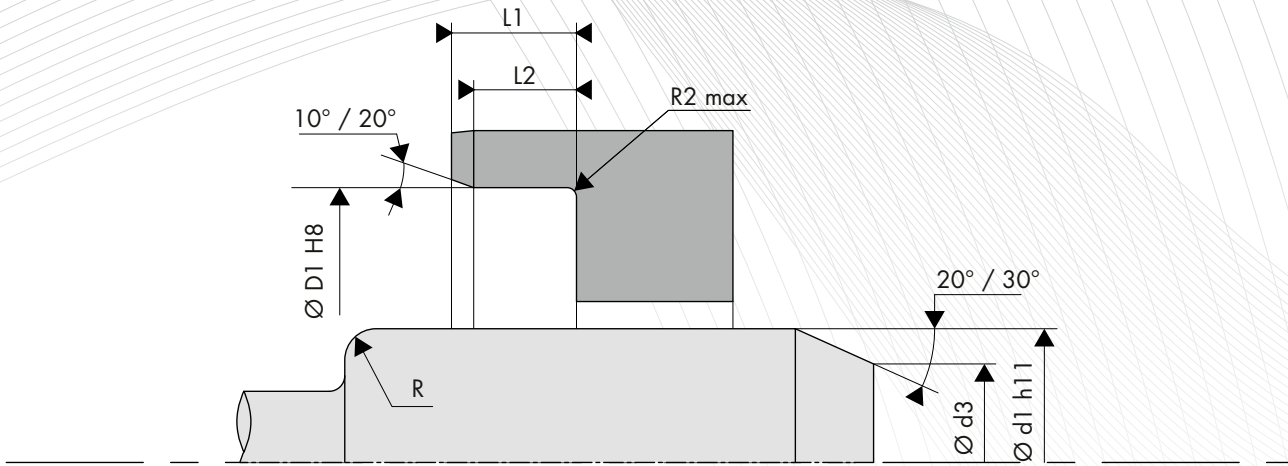

HOUSING DESIGN

Surface roughness

| | |
|------|----------------------------|
| Ra | 1.6 to 6.3 μm |
| Rz | 10.0 to 25.0 μm |
| Rmax | $\leq 25.0 \mu\text{m}$ |

Housing tolerance

| Bore diameter $\varnothing D1$ (mm) | Tolerance H8 (mm) |
|--|----------------------|
| $3.0 < \varnothing D1 \leq 6.0$ | 0 / +0.018 |
| $6.0 < \varnothing D1 \leq 10.0$ | 0 / +0.022 |
| $10.0 < \varnothing D1 \leq 18.0$ | 0 / +0.027 |
| $18.0 < \varnothing D1 \leq 30.0$ | 0 / +0.033 |
| $30.0 < \varnothing D1 \leq 50.0$ | 0 / +0.039 |
| $50.0 < \varnothing D1 \leq 80.0$ | 0 / +0.046 |
| $80.0 < \varnothing D1 \leq 120.0$ | 0 / +0.054 |
| $120.0 < \varnothing D1 \leq 180.0$ | 0 / +0.063 |
| $180.0 < \varnothing D1 \leq 250.0$ | 0 / +0.072 |
| $250.0 < \varnothing D1 \leq 315.0$ | 0 / +0.081 |
| $315.0 < \varnothing D1 \leq 400.0$ | 0 / +0.089 |
| $400.0 < \varnothing D1 \leq 500.0$ | 0 / +0.097 |
| $500.0 < \varnothing D1 \leq 630.0$ | 0 / +0.110 |

Housing radius and width

| Height H1 (mm) | Width | | Radius R2 max (mm) |
|-------------------|----------------------|----------------------|-----------------------|
| | L2min (H1 x 0.85) | L1min (H1 x +0.3) | |
| 7.00 | 5.95 | 7.30 | 0.50 |
| 8.00 | 6.80 | 8.30 | |
| 10.00 | 8.50 | 10.30 | |
| 12.00 | 10.30 | 12.30 | 0.70 |
| 15.00 | 12.75 | 15.30 | |
| 20.00 | 17.00 | 20.30 | |